



191 K SP

Single flavor
counter model
for neutral
or flavored
milkshakes



Performance and Quality Compact shake machine provides superior performance to other machines in the same category. It allows you to vary the overrun so that you can use any type of mix and produce special and premium shakes. Interactive display communicates with operators delivering instructions and performance data.



Convenience Self-pasteurization system allows machine to be cleaned and disassembled just 9 times a year. Compact size and rear chimney fits into most settings and can be installed next to other equipment.




Savings Direct expansion cooling cylinder optimizes refrigeration efficiency for fast freeze downtime, less waste of product, ensuring higher quality and energy savings. Dispenser is equipped with an automatic self-closing system to stop the flow of shake eliminating any waste.



Hygiene Hopper Agitator prevents product stratification and helps reduce foam by maintaining a fluid consistency. Cleaning is simplified thanks to cylinder heating and easy disassembly of the dispensing unit. TEOREMA guarantees facilitated assistance by providing online monitoring and diagnosis on a tablet, phone or PC wherever you are.



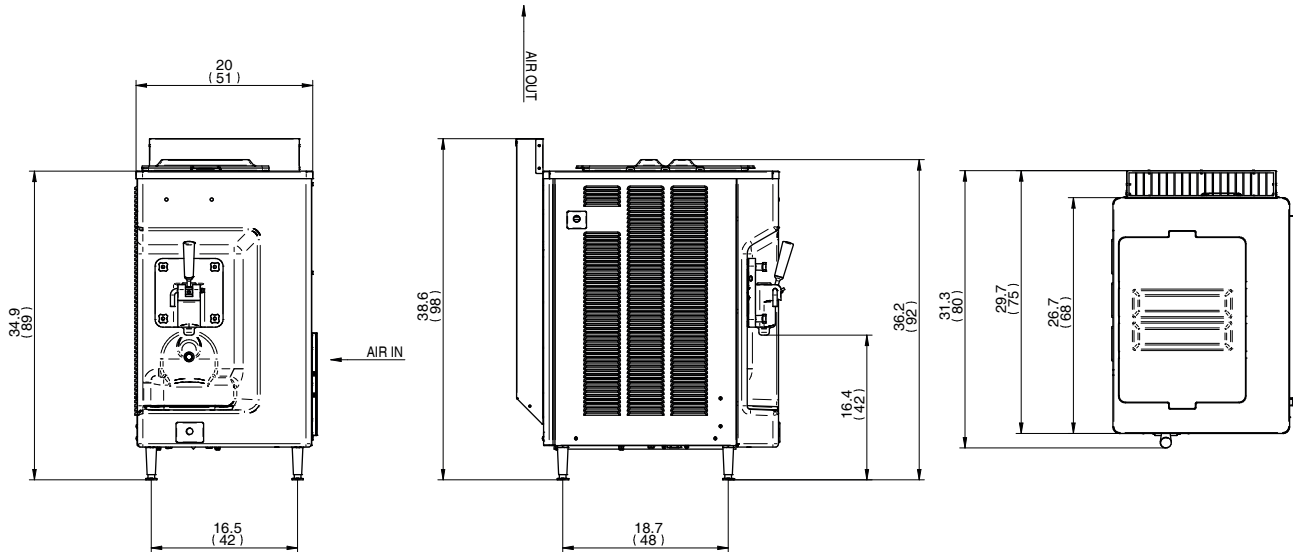

AIR

Weights		lbs.	kgs.
Net		319	145
Crated		368	167
Volume		cu. ft.	cu. m.
Volume		30.38	0.86
Dimensions		in.	cm.
Width		20	51
Depth		29.7	75
Height		38.6	98
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/3 Air	20A	15A	3P, 3W

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

1,2 HP

Refrigeration System

R404A

Air Cooled *

Minimum clearance: 2" (5 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

Hopper Capacity

18 quarts (17 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68 °F (20 °C).

Bidding Specs

Electrical	Volt	Hz	Ph	Neutral	Yes	No	Cooling	Air	Water
Options	_____								



Distributed by:
GTI Designs
35 Trade Zone Court
Ronkonkoma, NY 11779

Tel: 800-896-4484
631-981-2100
CustomerService@gtidesigns.com
www.gtidesigns.com