


# Columbus

## Case Features:


- Available for Meat, Fish, Cheese, Deli, Prepared Foods, Bakery, Bain Marie, Hot, Salads and Grab 'n' Go
- Optional Glass Solutions:
  - Lift up Hydraulic Glass** for ease of cleaning
  - Low Glass** for integrated grab 'n' go solutions
- All cases available to be channeled together
- LED light technology enhances presentation
- Available in 45° and 90° angles

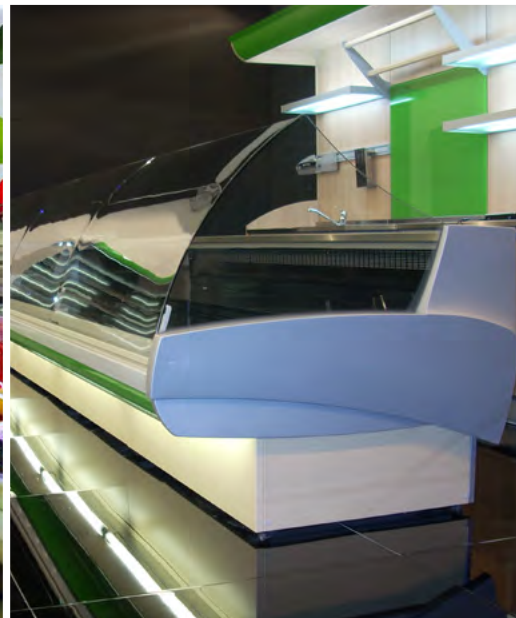

**HEATED**

**REFRIGERATED**

**GRAB 'N' GO**

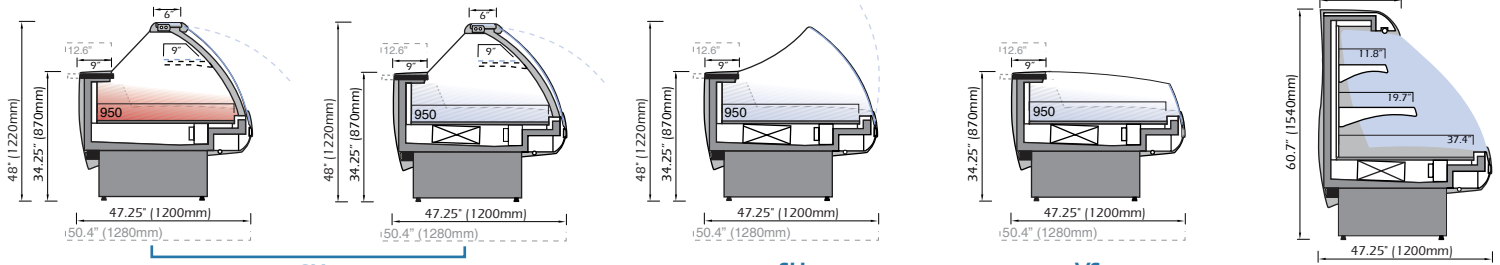


Glass Options:

CH

SH

VS

45° & 90° Available for Glass Options CH & VS Only

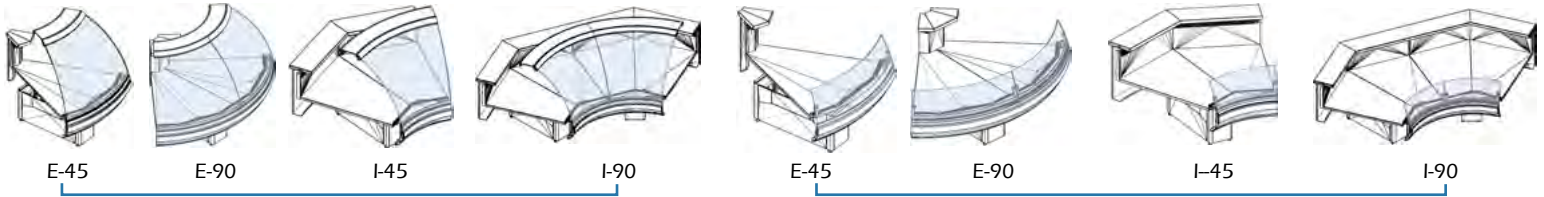

Glass Options:

CH

VS

\* All Cases are available with remote option only and available with feet or base.

**DISPLAY CASES**

Type	Model	Width	Depth	Height CH/SH/VMC	Height VS	Electrical Requirements
<b>REFRIGERATED</b> Glass Options: CH/SH/VS	CR-937	41.6" (1057mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
	CR-1250	54" (1370mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/7 Amps
	CR-1562	66.25" (1682mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/7 Amps
	CR-1875	78.5" (1995mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/10 Amps
	CR-2500	103.2" (2620mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/13 Amps
	CR-3125	127.75" (3245mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/13 Amps
	CR-3750	152.5" (3870mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/15 Amps
<b>45° &amp; 90°</b> Glass Options: CH/VS	CRI-45	22.2" (562mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
	CRI-90	41" (1039mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
	CRE-45	38.3" (971mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
	CRE-90	70.5" (1795mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
<b>SALADS</b> Glass Options: CH/SH/VS	CS-1250	54" (1370mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
	CS-1562	66.25" (1682mm)	47.25" (1200mm)	48" (1220mm)	35" (890)	220V/1 Phase/60Hz/5 Amps
<b>HEATED DECK</b> Glass Option: CH	CHD-937	41.6" (1057mm)	47.25" (1200mm)	48" (1220mm)	--	220V/1 Phase/60Hz/8 Amps
	CHD-1250	54" (1370mm)	47.25" (1200mm)	48" (1220mm)	--	220V/1 Phase/60Hz/15 Amps
	CHD-1562	66.25" (1682mm)	47.25" (1200mm)	48" (1220mm)	--	220V/1 Phase/60Hz/15 Amps
<b>BAIN MARIE</b> Glass Option: CH	CBM-1250	54" (1370mm)	47.25" (1200mm)	48" (1220mm)	--	220V/1 Phase/60Hz/15 Amps
	CBM-1562	66.25" (1682mm)	47.25" (1200mm)	48" (1220mm)	--	220V/1 Phase/60Hz/15 Amps
<b>GRAB 'N' GO</b>	CMR-1250	54" (1370mm)	47.25" (1200mm)	60.7" (1540mm)	--	220V/1 Phase/60Hz/7 Amps
	CMR-1875	78.5" (1995mm)	47.25" (1200mm)	60.7" (1540mm)	--	220V/1 Phase/60Hz/10 Amps

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.