


# Minimal

## Case Features:

- Available for Pastries, Chocolates, Macarons, Bread
- LED light technology enhances presentation
- Available in 3 sneeze guard options.
- Fully Refrigerated/ Dry/ Neutral
- Choice of Colors/Laminates and Finishes for the front case decoration



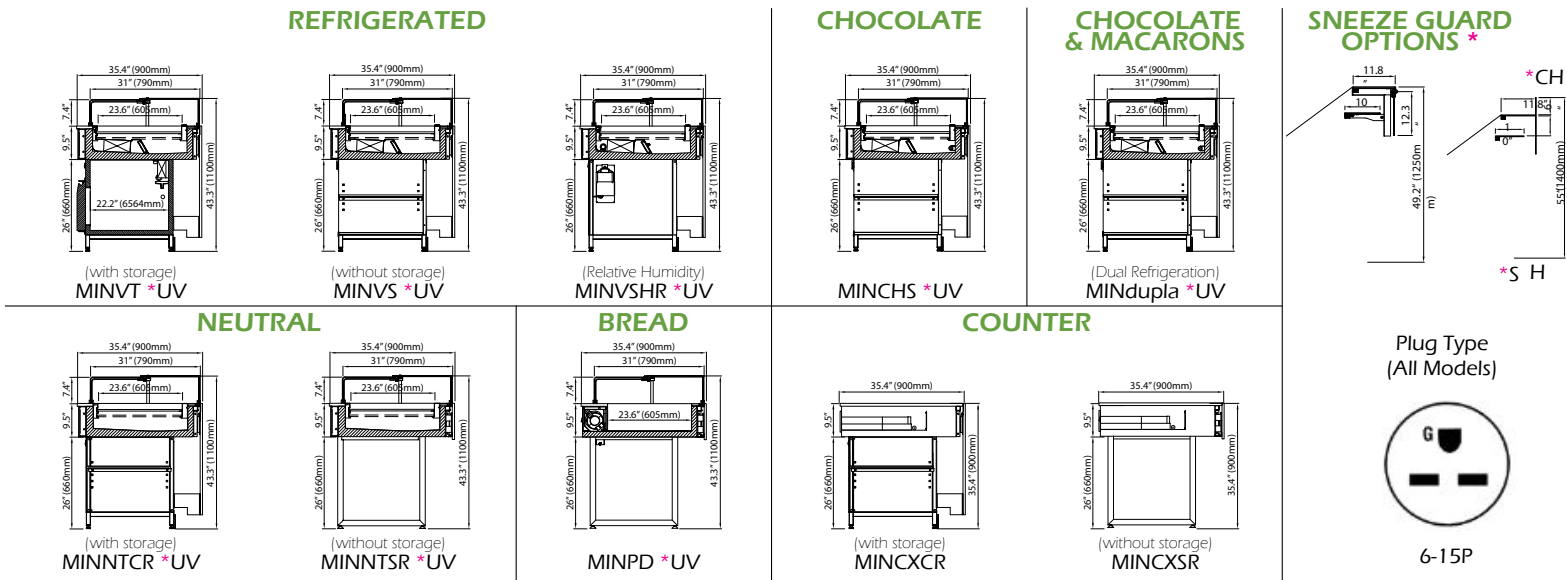

All cases come with 3 sneeze guards options to chose from - \*UV \*CH \*SH

## DISPLAY CASES

Type	Model	Width	Depth	Height	Electrical Requirements
<b>Refrigerated</b> (with storage)	MINVT-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/4 Amps
	MINVT-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	MINVT-2050	82.3" (2090mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	MINVT-2500	100" (2540mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/4 Amps
<b>Refrigerated</b> (without storage)	MINVS-850	33.5" (840mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/4 Amps
	MINVS-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/4 Amps
	MINVS-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	MINVS-2050	82.3" (2090mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	MINVS-2500	100" (2540mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	Relative Humidity	MINVSHR-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)
Relative Humidity	MINVSHR-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
<b>Chocolate</b>	MINCHS-850	33.5" (840mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/4 Amps
	MINCHS-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	MINCHS-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/6 Amps
<b>Chocolate &amp; Macarons</b> (Dual Refrigeration)	MINdupla-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/5 Amps
	MINdupla-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/6 Amps
<b>Neutral</b> (with storage)	MINNTRC-850	33.5" (840mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRC-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRC-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRC-2050	82.3" (2090mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRC-2500	100" (2540mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
<b>Neutral</b> (without storage)	MINNTRSR-850	33.5" (840mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRSR-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRSR-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRSR-2050	82.3" (2090mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINNTRSR-2500	100" (2540mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
<b>Bread</b>	MINPD-850	33.5" (840mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINPD-1250	50.8" (1290mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINPD-1650	66.5" (1690mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
	MINPD-2050	82.3" (2090mm)	35.4" (900mm)	43.3" (1100mm)	220V/1Phase/60Hz/1 Amps
<b>Counter</b> (with storage)	MINCXCR-515	21.9" (555mm)	35.4" (900mm)	35.4" (900mm)	220V/1Phase/60Hz/0 Amps
	MINCXCR-1030	42.1" (1070mm)	35.4" (900mm)	35.4" (900mm)	220V/1Phase/60Hz/0 Amps
<b>Counter</b> (without storage)	MINCXSR-515	21.9" (555mm)	35.4" (900mm)	35.4" (900mm)	220V/1Phase/60Hz/0 Amps
	MINCXSR-1030	42.1" (1070mm)	35.4" (900mm)	35.4" (900mm)	220V/1Phase/60Hz/0 Amps

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.