



XVL 3

GM

Advanced Gravity-Fed Soft Serve Model with ideal for creamy and fibrous Ice Cream, Custard or Plant based recipes. Built in Mixer allows operator to easily mix in toppings.



Performance and Quality The Carpigiani reputation for the smoothest, creamiest soft serve in the market is proven with this powerful, versatile model. Hopper mixer accommodates any type of mix with high level of solids or water.



Convenience Gravity fed versions includes a one-piece beater that is easy to clean with no assembly required. Hopper mixer easily snaps into place. Audible Signal alerts when refill is needed. Least number of components to clean in the industry.



Savings Unique cylinder construction delivers better results using less electricity. Independent cylinders allow one side to be turned off saving power during low season. Water-cooled & Air Cooled versions available.




Safety TEOREMA guarantees facilitated assistance by providing on-line monitoring and diagnosis on a tablet, phone or PC wherever you are.



Hygiene Unique patented heat cleaning cycle option allows for faster and easier cleaning with less water waste. Standby mode maintains safe product temperatures in the freezing cylinder and mix hopper utilizing minimal energy during idle periods.



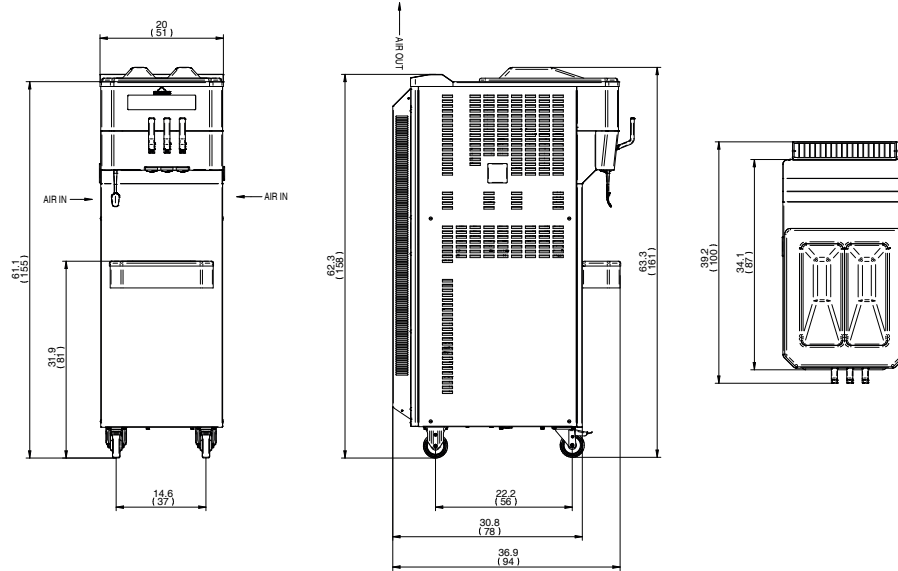

AIR

Weights		lbs.	kgs.
Net		661	300
Crated		701	318
Volume		cu. ft.	cu. m.
Volume		64.63	1.83
Dimensions		in.	cm.
Width		20	51
Depth		37	94
Height		63.3	161
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/3 Air	30A	30A	3P, 3W

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

1,5 HP + 1,5 HP

Refrigeration System

R404A

Air Cooled *

Minimum clearance: 4" (10 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

Hopper Capacity

13.7 + 13.7 quarts (13 + 13 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. * Room temperature 68 °F (20 °C).

Bidding Specs

Electrical	Volt	Hz	Ph	Neutral	Yes	No	Cooling	Air	Water
Options									



Distributed by:
GTI Designs
35 Trade Zone Court
Ronkonkoma, NY 11779

Tel: 800-896-4484
631-981-2100
CustomerService@gtidesigns.com
www.gtidesigns.com