





T-Line

Case Features:


- Combo Units - offering 3 options in Grab n Go Service Units -Refrigerated Top and Bottom option Refrigerated and Ambient/Dry Top section.
- Combo offers Double Pane Anti -Condensation Glass with Vertical fixed front & side UV bonded Frameless Glass and Rear Sliding Doors
- Stainless Steel Interior finish
- Modern, Jewelry Case Style design
- Custom color design and finishing options for case panels
- LED light technology enhances presentation
- Frozen Dessert Model Available, Call for More Information

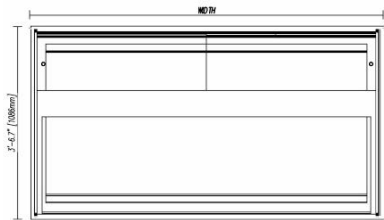


Top



T-Form



High Glass



Low Glass

DISPLAY CASES

Type	Model	Width	Depth	Height	Electrical Requirements
Refrigerated (Low Glass)	TL-1500	59" (1500mm)	43" (1087mm)	40" (1000mm)	220V/1Phase/60Hz/10amps
	TL-1800	71" (1800mm)	43" (1087mm)	40" (1000mm)	220V/1Phase/60Hz/10amps
	TL-2000	79" (2000mm)	43" (1087mm)	40" (1000mm)	220V/1Phase/60Hz/10amps
	TL-2200	87" (2200mm)	43" (1087mm)	40" (1000mm)	220V/1Phase/60Hz/10amps
Refrigerated (High Glass)	TH-1500	59" (1500mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
	TH-1800	71" (1800mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
	TH-2000	79" (2000mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
	TH-2200	87" (2200mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
Refrigerated (High Glass)	TH-1500	59" (1500mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
	TH-1800	71" (1800mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
	TH-2000	79" (2000mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps
	TH-2200	87" (2200mm)	43" (1087mm)	48" (1000mm)	220V/1Phase/60Hz/10amps

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.



DESIGNS

35 Trade Zone Court ■ Ronkonkoma, NY 11779 ■ www.gtidesigns.com
 Phone 631.981.2100 ■ Fax 631.981.3509 ■ CustomerService@gtidesigns.com